

AUTOMATIC SEWING SYSTEMS

AUTOMATIC BOARDING MACHINE FOR KNEEHIGHS AND STOCKINGS DIRECTLY LINKED TO THE TOE CLOSER.

LC36 SP/DP










AUTOMATIC SEWING SYSTEMS LC36 SP/DP

Automatic pantyhose U-Seaming machine. The new pantyhose seaming machine entirely developed and built by Santoni sets very high standards in sewing quality and superior flexibility thanks to the fully electronic control.

AUTOMATIC SEWING SYSTEMS LC36 SP/DP

Specification	Value
Dimensions	Ø 2.200 x 2.100 (h) mm
Sewing heads	Nr.1 Union Special 9M
Clamps	Nr. 7 - 360 mm
Air pressure	6 bar
Air consumption	200 NI/min
Absorbed power	3,7 Kw
Minimum cycle time	4,5 Sec.
Max. Production	66 Dz/hr (pair)


Features Features	
Qty. 7 clamps with solenoid closing system	
External electrical rail to operate the clamps makes maintenance easier	
Wide clear area around loading station allows to accommodate up to 2 operators	
Double positioning device (DP) to correctly align waistband and crotch or single positioner (SP) for welts only	
Possibility to link to a toe closer	
Intermediate unloading system for garments not correctly positioned (with DP only)	

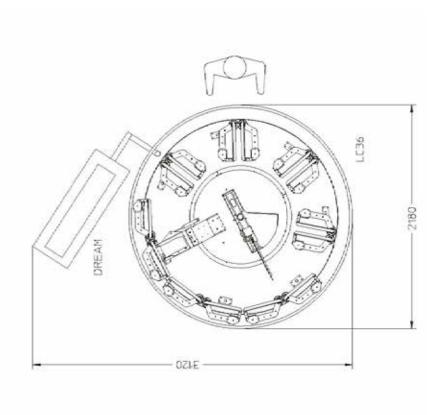

U-SEAMING



DISCLAIMER:

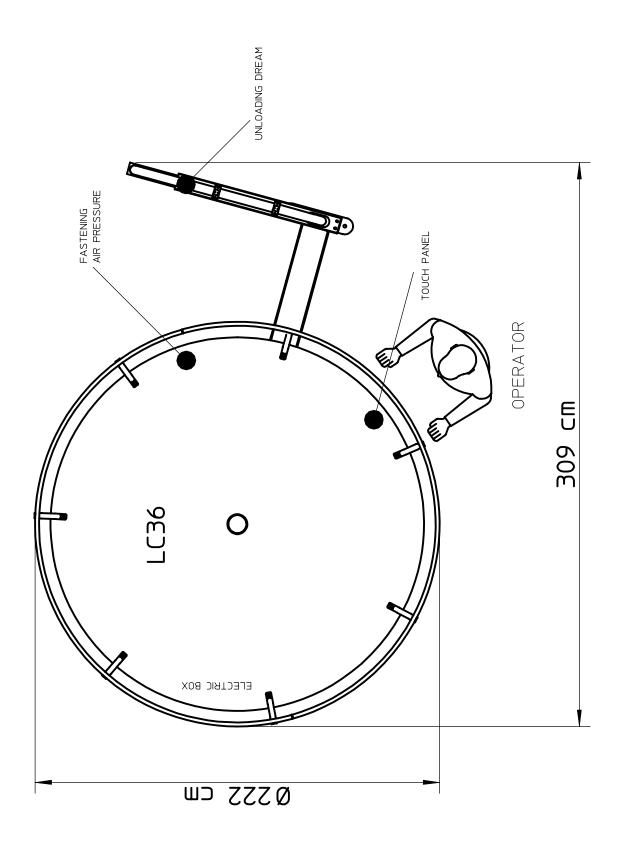







SANTONI SPA